

PZ 011 - Padló lefolyó csatornák fürdőszobához



The PZ 011 channel has rims for water-proofing and is designed to be installed along a blind wall ? it has rear perpendicular rim to fit under vertical tiles; other sides have horizontal rims to fit under tile flooring. The channel outlet is located in the middle and the overall height including the outlet is 100 mm. Direction of the outlet can be set revolvingly. Standard lengths of channels are 800 a 900 mm. Other custom made lengths possible. Material - stainless steel AISI 304, other possible on wish (e.g. AISI 316). In standard design one of 5 types of cover grids can be selected ALFA 1 - BETA 3. Other designs of grids can be provided per order. Standard grids have polished finish. Balottini sand-blast surface finish ? decent mat ? can be ordered without any effect on price. For cleaning we recommned WÜRTH detergents ? material preservation (no. 0893 121 K) and material cleaning (no. 893 121 1).

Értékelés: Még nincs értékelés

[Tegye fel kérdését a termék?](#)

Gyártó:[AZP Brno](#)

Leírás

The PZ 011 channel has rims for water-proofing and is designed to be installed along a blind wall ? it has rear perpendicular rim to fit under vertical tiles; other sides have horizontal rims to fit under tile flooring. The channel outlet is located in the middle and the overall height including the outlet is 100 mm. Direction of the outlet can be set revolvingly. Standard lengths of channels are 800 a 900 mm. Other custom made lengths possible. Material - stainless steel AISI 304, other possible on wish (e.g. AISI 316). In standard design one of 5 types of cover grids can be selected ALFA 1 - BETA 3. Other designs of grids can be provided per order. Standard grids have polished finish. Balottini sand-blast surface finish ? decent mat ? can be ordered without any effect on price. For cleaning we recommned WÜRTH detergents ? material preservation (no. 0893 121 K) and material cleaning (no. 893 121 1).

Szállított termékek

1. st. steel channel
2. st. steel outlet including waste trap
3. grid

A Beüzemeléshez szükséges

1. Suitable hole to rectify the channel
2. Downpipe prepared according to drawing
3. Waterproofing prepared according to drawing

További információk a termék?

- [PZ 011 data for projectants - \(41 kB \)](#)

Alapvető m?szaki adatok Overall dimensions including rims
Dimensions of grid


850 (950) x 117 x 131 mm
791 (891) x 70 mm

Csatorna beömlők : PZ 011 - Padló lefolyó csatornák fürdőszobához

Kivezetés
Overall depth necessary for installation
Material

st. steel, d = 40 mm, revolving 360°
100 mm
st. steel AISI 304 (other per order)

Ábrák

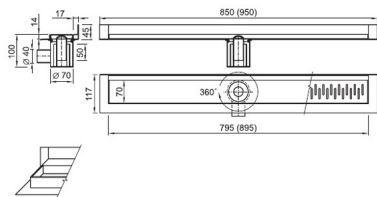

Vélemények

Még senki sem nyilvánított véleményt erről a termékről.