

PZ 011 L.800. - Padló lefolyó csatornák fürdőszobához, két fal közé (hátsó és baloldali) hosszúság: 800 mm, magasság: 100 mm, lehetséges rács típus: ALFA 1 - BETA 3



The PZ 011 L (PZ 011 P) channel has rims for water-proofing and is designed to be installed between 2 walls ? its rear and side rims are perpendicular to fit under vertical tiles. Front rim and other side rim are horizontal to fit under tile flooring. As for the side rim we differ between sides ? left design (PZ 011L) ? vertical rear and left rim; right design (PZ 011P) ? vertical rear and right rim.. The channel outlet is located in the middle and its overall height including the outlet is 100 mm only. Standard lengths of channels are 800 a 900 mm. Other custom made lengths possible. Material - stainless steel AISI 304, other possible on wish (e.g. AISI 316). In standard design one of 5 types of cover grids can be selected ALFA 1 - BETA 3. Other designs of grids can be provided per order. Standard grids have polished finish. Balottini sand-blast surface finish ? decent mat ? can be ordered without any effect on price. For cleaning we recomnend WÜRTH detergents ? material preservation (no. 0893 121 K) and material cleaning (no. 893 121 1).

Értékelés: Még nincs értékelés

[Tegye fel kérdését a termékről](#)

Gyártó: [AZP Brno](#)

Leírás

The PZ 011 L (PZ 011 P) channel has rims for water-proofing and is designed to be installed between 2 walls ? its rear and side rims are perpendicular to fit under vertical tiles. Front rim and other side rim are horizontal to fit under tile flooring. As for the side rim we differ between sides ? left design (PZ 011L) ? vertical rear and left rim; right design (PZ 011P) ? vertical rear and right rim.. The channel outlet is located in the middle and its overall height including the outlet is 100 mm only. Standard lengths of channels are 800 a 900 mm. Other custom made lengths possible. Material - stainless steel AISI 304, other possible on wish (e.g. AISI 316). In standard design one of 5 types of cover grids can be selected ALFA 1 - BETA 3. Other designs of grids can be provided per order. Standard grids have polished finish. Balottini sand-blast surface finish ? decent mat ? can be ordered without any effect on price. For cleaning we recomnend WÜRTH detergents ? material preservation (no. 0893 121 K) and material cleaning (no. 893 121 1).

Szállított termékek

1. st. steel channel
2. st. steel outlet including waste trap
3. grid

A Beüzemeléshez szükséges

1. Suitable hole to rectify the channel
2. Downpipe prepared according to drawing
3. Waterproofing prepared according to drawing


További információk a termékről

- [PZ 011L data for projectants - \(35 kB \)](#)
- [PZ 011P data for projectants - \(35 kB \)](#)

Alapvető műszaki adatok Overall dimensions including rims
Dimensions of grid
Kivezetés
Overall depth necessary for installation
Material

837 (937) x 117 x 131 mm
791 (891) x 70 mm
st.steel, d = 40 mm, revolving 360°
100 mm
st.steel AISI 304 (other per order)

ÁbrákLevé provedení

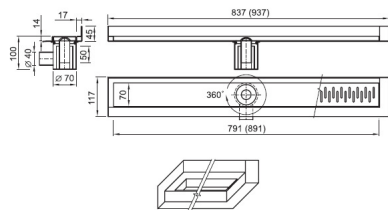

Vélemények

Még senki sem nyilvánított véleményt erről a termékről.